




Description:

EPP couplings enable the quick and durable connection of ducts, elbows, and tees within the PEFLEX EPS 2.0 system. Thanks to their flexible design, the couplings adapt to the joined components, ensuring an airtight seal without the need for adhesives, silicone, or other sealants. The push-fit assembly allows for easy installation and effortless dismantling of the system.

Variants:

- Ø200 – for components with diameters Ø160/200 mm
- Ø250 – for components with diameters Ø200/250 mm

Dimensions:

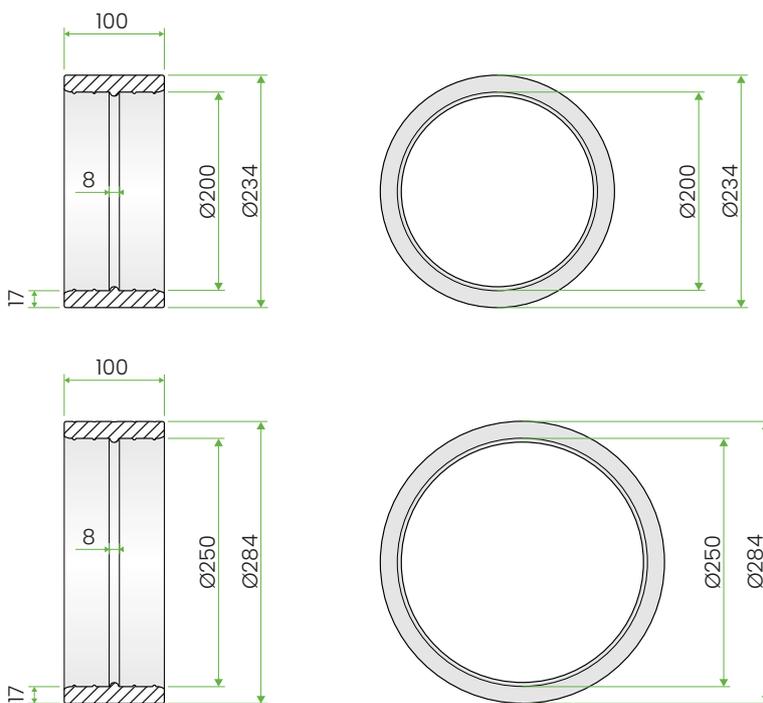

Product	Internal Diameter	External Diameter	Length	Wall Thickness	Material	Material Density
PEFLEX EPP coupling 160	200 mm	234 mm	100 mm	17 mm	EPP	40 kg/m ³
PEFLEX EPP coupling 200	250 mm	284 mm	100 mm	17 mm	EPP	40 kg/m ³